

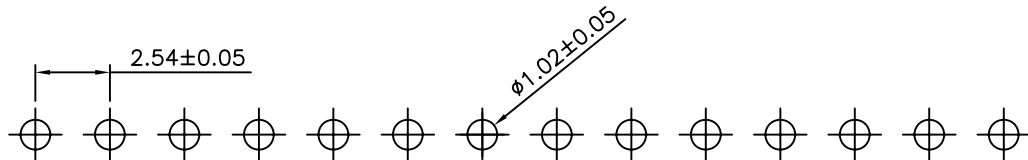
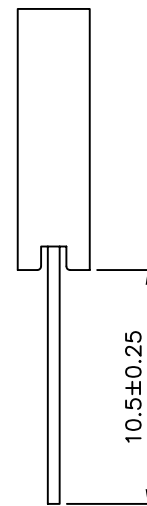


SPECIFICATIONS

Current Rating: 3Amp
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Withstand Voltage: 1000V AC/Minute
 Operation Temperature: -40°C To +105°C
 Contact: Brass, Gold Plated Over Nickel
 Insulator: Polyester (UL94V-0)
 Standard: PBT+30%G.F

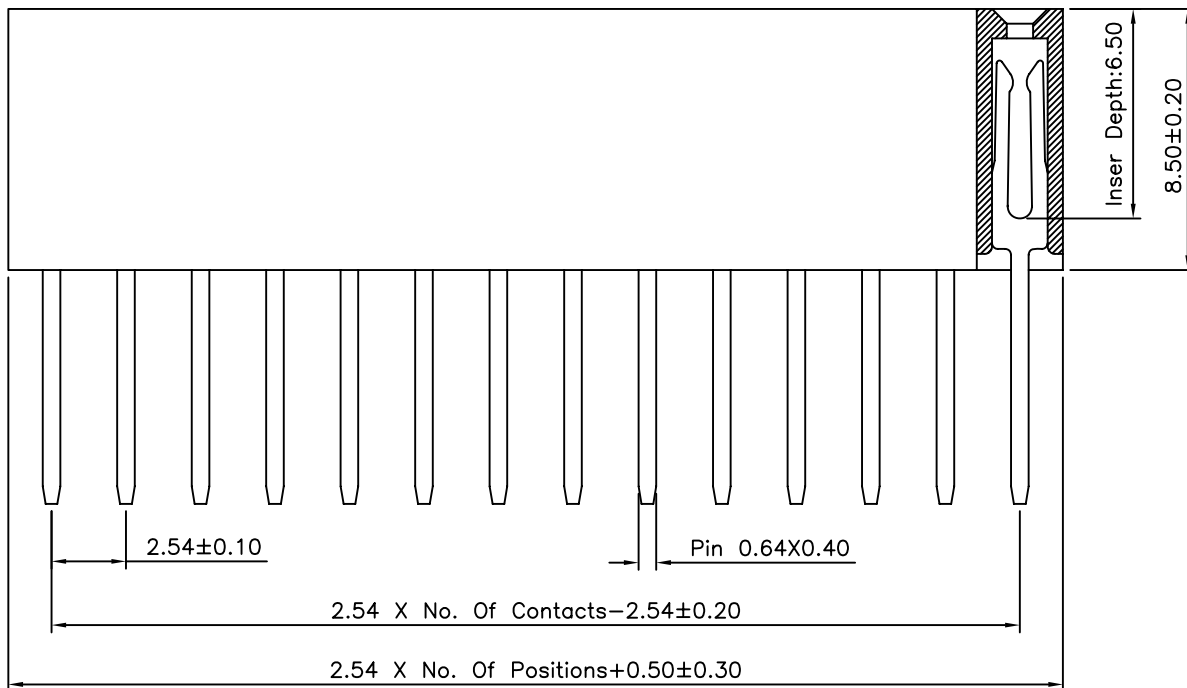

Recommended PCB Board Hole Layout



4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

18689

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY PEGA
 REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

NO.	REV.	DESCRIPTION	CHK	DATE
△	A0	NEW RELEASE	HZF	02/08/2007
		REVISIONS		

SCALE NONE



UNIT mm